

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1102.8 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	85.9V x 82.2H
	At 50% of Imax	56.4V x 55.2H
	At 90% of Imax	21.6V x 18.1H

Beam Flux	Total	999.0 lumens per klm.
	To 10% of Imax	817.4 lumens per klm.
	To 50% of Imax	543.5 lumens per klm.
	To 90% of Imax	69.7 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.95V I:0.4341A P:93.967W PF:0.9842 Freq:49.99Hz Lamp Flux:13974.8x1 lm		
NAME: LED High Bay Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:100W	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

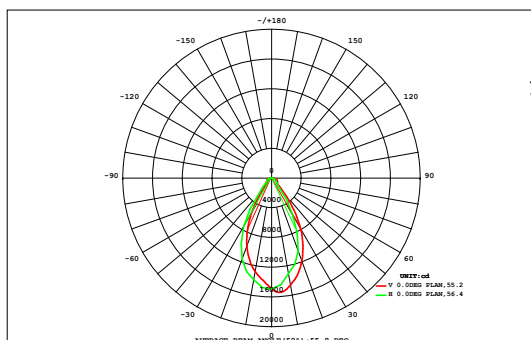

DATA OF LAMP		Eff:148.72lm/W	
NJZMODEL100-V01-RZ-60-PC-GR		Imax(cd)	15412
NOMINAL POWER(W)	100	AVAILABILITY(%)	82.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	11494
NOMINAL FLUX(lm)	13974.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	13975
TEST VOLTAGE(V)	220	θ @50% (H,V)	55,56DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.05	0.64	2.08	4.10	6.56	9.07	11.3	12.7	13.4	13.5	12.9	11.5	9.30	6.73	4.18	2.02	0.57	0.04	121	0.00
70	0.11	1.20	3.70	6.86	10.3	13.6	16.4	18.1	18.9	19.1	18.5	17.0	14.2	10.7	7.11	3.79	1.19	0.09	181	0.00
60	0.18	1.83	5.36	9.55	13.8	17.7	21.1	23.4	24.6	24.8	23.9	21.8	18.5	14.5	10.1	5.66	1.91	0.16	239	0.00
50	0.23	2.28	6.44	11.2	15.9	20.7	25.9	35.2	44.8	45.3	36.3	26.4	21.4	16.8	11.9	6.85	2.39	0.21	330	81.6
40	0.28	2.62	7.19	12.3	17.7	25.6	50.1	95.3	133	131	93.4	51.3	26.5	18.5	13.1	7.66	2.73	0.26	689	519
30	0.32	2.85	7.68	13.1	19.7	43.7	125	221	287	278	209	116	43.1	20.0	14.0	8.20	2.96	0.29	1411	1289
	0.34	3.00	8.00	13.7	22.5	81.8	207	318	391	375	299	188	73.3	22.2	14.6	8.55	3.09	0.31	2030	1927
	0.35	3.07	8.18	14.2	26.3	110	250	365	441	419	342	227	94.9	24.0	15.0	8.77	3.15	0.32	2351	2255
	0.35	3.06	8.15	14.1	26.8	108	245	367	440	413	335	220	88.6	23.0	14.9	8.73	3.11	0.32	2318	2223
	0.33	2.96	7.86	13.5	22.9	75.8	186	293	359	342	273	168	59.2	20.5	14.3	8.43	3.00	0.30	1851	1750
	0.31	2.80	7.49	12.8	19.3	41.8	108	192	247	238	174	90.1	29.4	19.1	13.7	8.03	2.80	0.27	1207	1089
-30	0.27	2.53	6.89	11.9	17.1	22.9	41.1	75.7	102	95.7	63.7	31.1	20.5	17.9	12.8	7.41	2.52	0.23	532	361
-40	0.22	2.16	6.03	10.5	15.1	19.6	21.0	19.8	21.1	21.0	19.0	20.4	20.3	16.2	11.4	6.46	2.12	0.18	233	0.00
-50	0.17	1.67	4.79	8.64	12.5	16.1	19.2	21.1	21.8	21.9	21.8	20.4	17.3	13.5	9.28	5.08	1.59	0.12	217	0.00
-60	0.11	1.07	3.15	5.91	8.92	12.0	14.5	15.8	16.5	16.8	16.6	15.3	12.6	9.44	6.20	3.18	0.90	0.07	159	0.00
-70	0.06	0.46	1.43	2.84	4.68	6.51	8.09	9.17	10.6	10.8	9.47	8.35	6.59	4.66	2.69	1.21	0.30	0.02	88.0	0.00
-80	0.01	0.11	0.27	0.53	0.84	1.18	1.58	2.14	3.97	2.87	1.78	1.32	0.89	0.54	0.26	0.08	0.01	0.00	18.4	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	3.70	34.3	94.7	166	261	626	1351	2084	2576	2468	1949	1234	557	258	175	100	34.3	3.19	13975	---
Φ a	0.00	0.00	0.00	0.00	26.3	420	1177	1927	2427	2323	1789	1057	340	10.0	0.00	0.00	0.00	0.00	---	11494

one-half-peak spread: U:26.5,D:30.2 , L:26.3,R:29.2


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.95V I:0.4341A P:93.967W PF:0.9842 Freq:49.99Hz Lamp Flux:13974.8x1 lm		
NAME: LED High Bay Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:100W	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

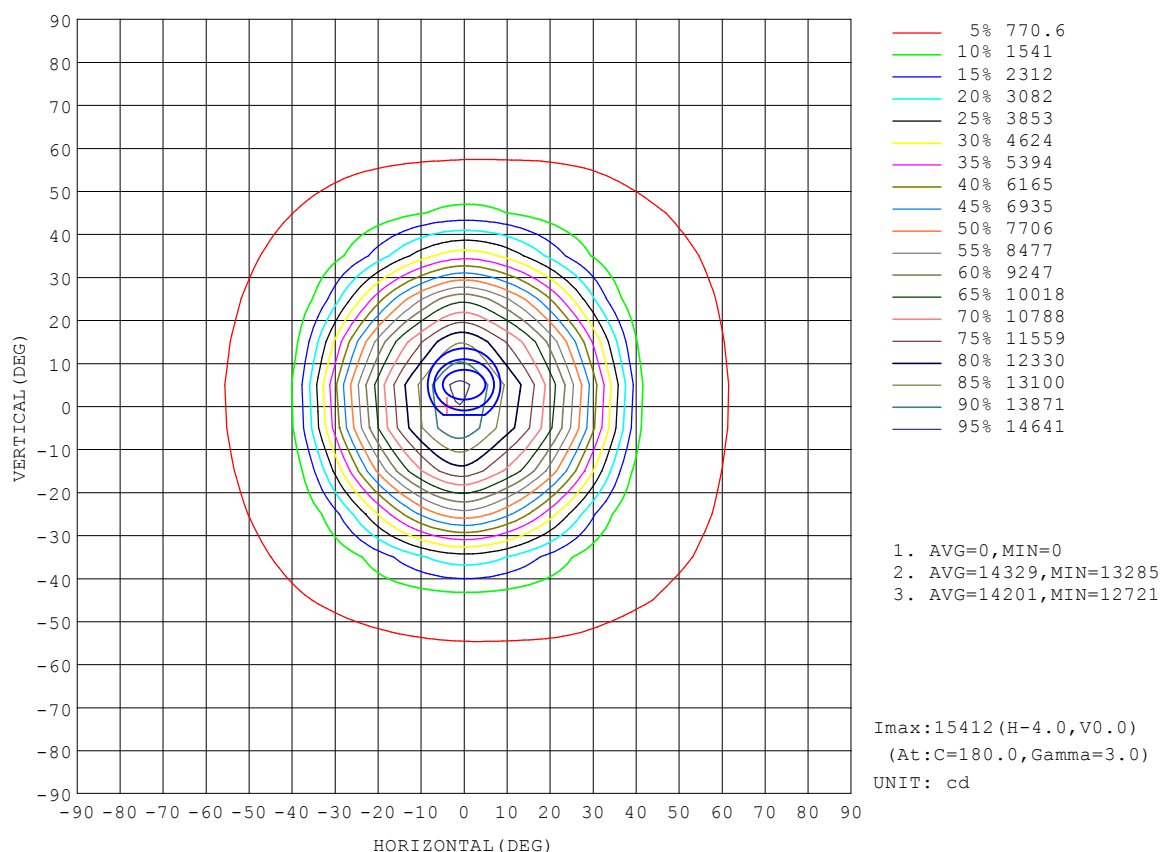


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.95V I:0.4341A P:93.967W PF:0.9842 Freq:49.99Hz Lamp Flux:13974.8x1 lm		
NAME: LED High Bay Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:100W	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

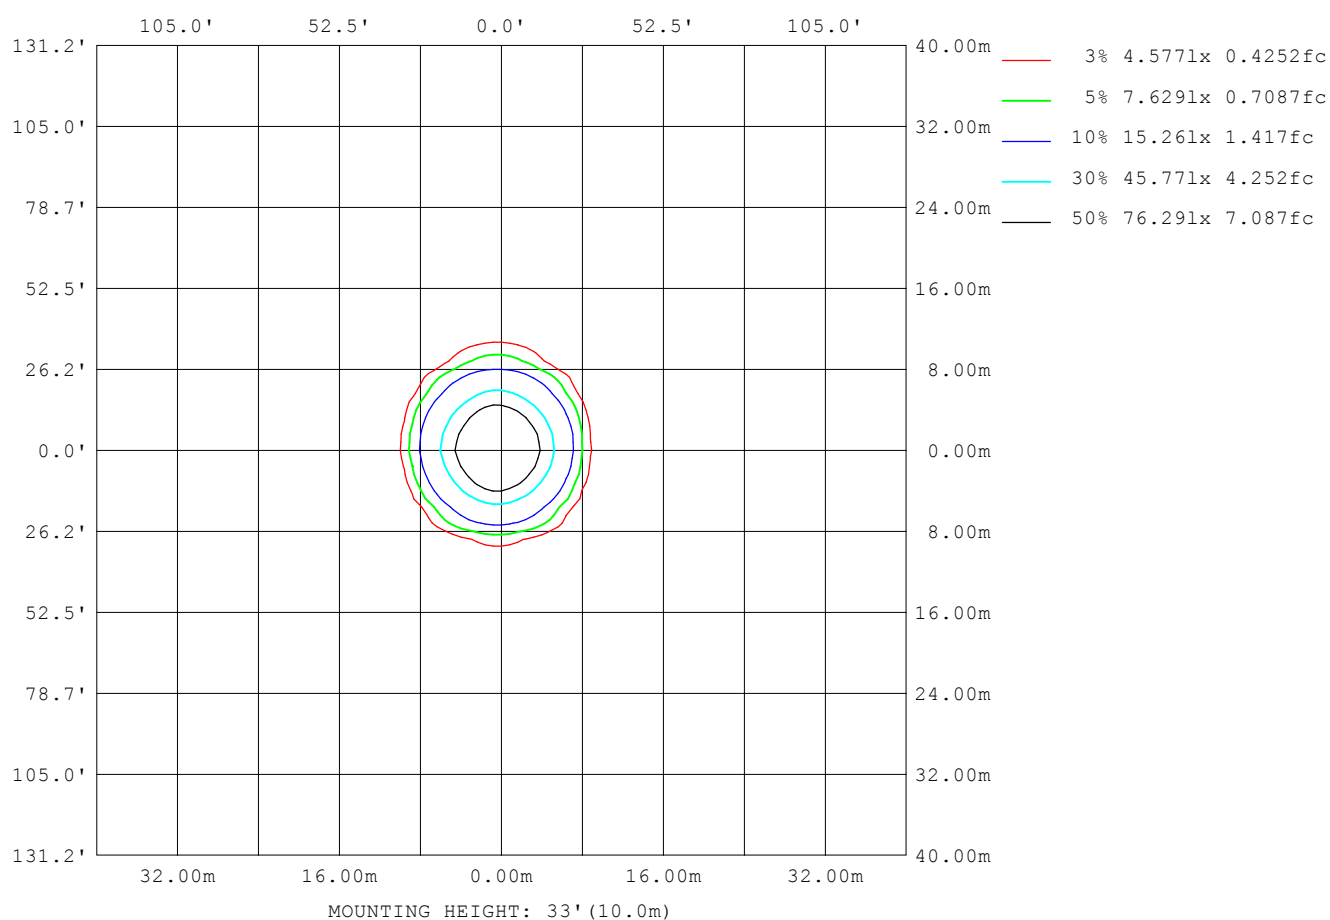

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

Planar Illuminance Curve

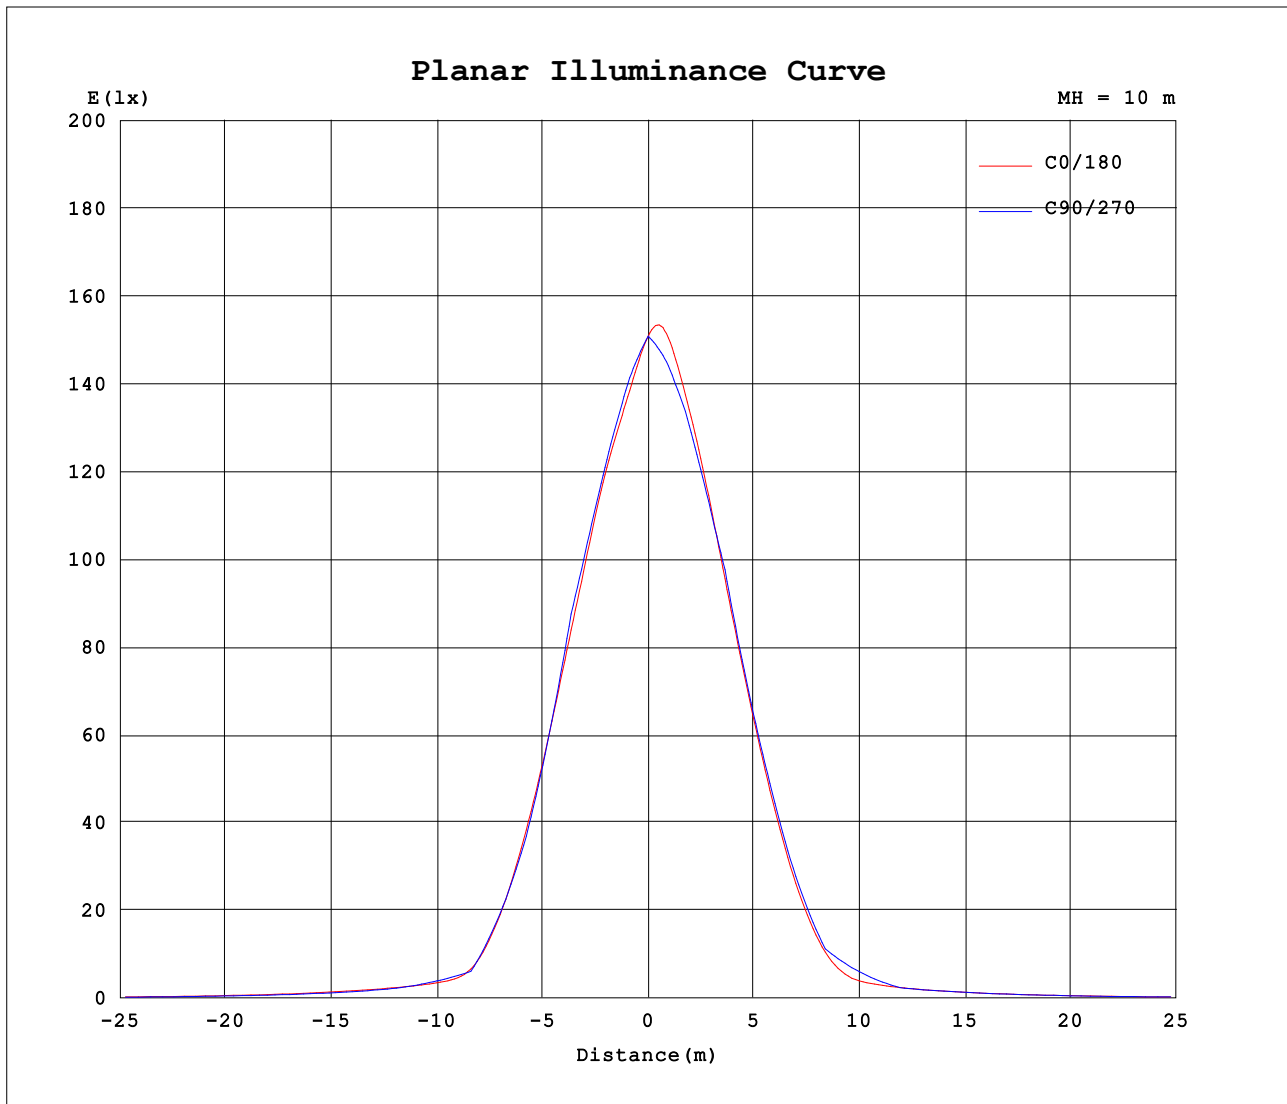


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:15 October 2019

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

AAI Figure

Test:U:219.95V I:0.4341A P:93.967W PF:0.9842 Freq:49.99Hz Lamp Flux:13974.8x1 lm		
NAME: LED High Bay Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:100W	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Flux out:7916 lm

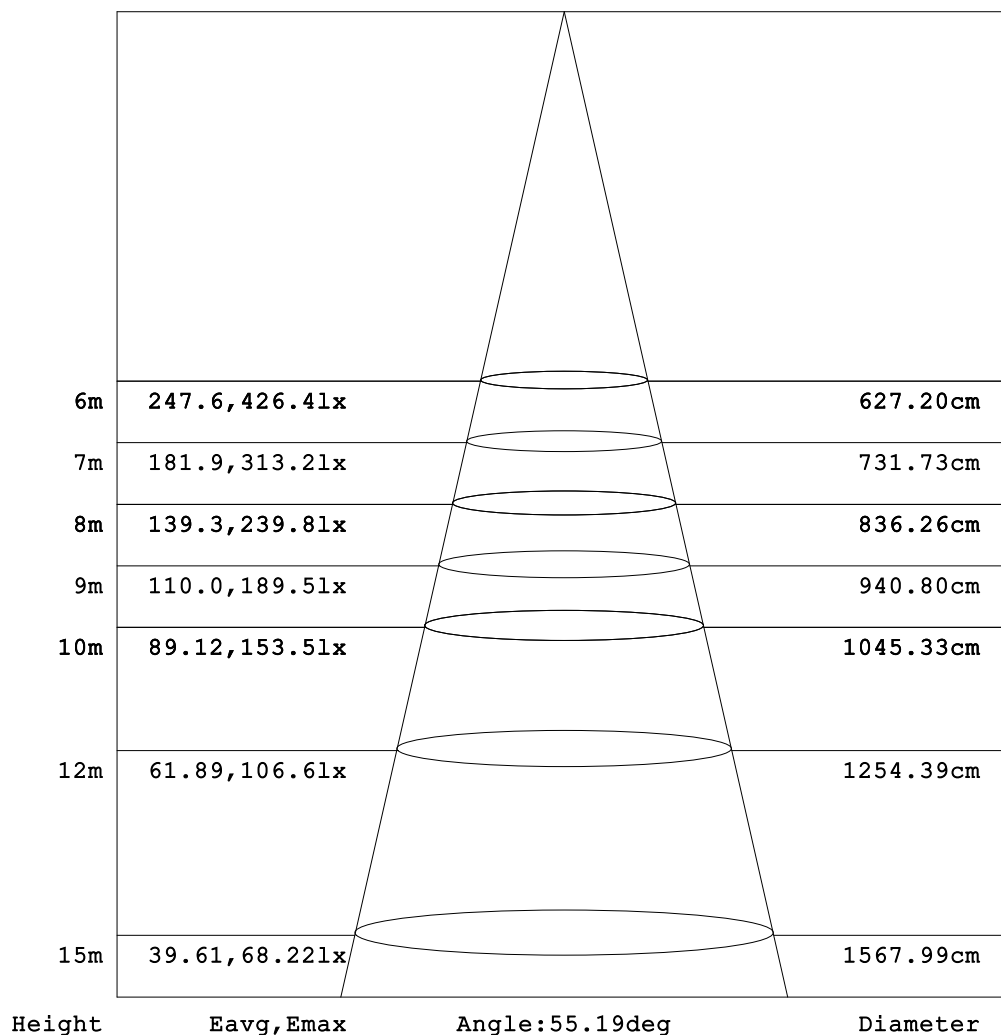

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.95V I:0.4341A P:93.967W PF:0.9842 Freq:49.99Hz Lamp Flux:13974.8x1 lm		
NAME: LED High Bay Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:100W	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.18	0.55	1.90	3.34	4.76	6.19	7.62	9.12	10.7	12.1	13.3	14.7	16.0	17.2	18.2	19.6	23.5	30.0	30.8
-75	0.17	0.36	2.33	4.77	7.27	10.1	13.1	15.4	18.2	20.8	22.9	25.0	27.0	28.6	29.7	30.7	31.9	35.1	38.2
-70	0.19	2.29	5.68	9.10	13.1	17.8	21.2	24.9	29.1	32.0	35.1	37.9	40.1	41.5	42.4	43.0	43.6	44.6	44.9
-65	0.16	0.72	5.16	10.4	16.3	21.9	27.2	31.7	36.0	39.7	43.1	46.3	49.1	51.4	52.6	53.4	53.6	54.2	55.0
-60	0.23	4.42	10.5	18.7	26.2	32.6	38.8	43.6	47.5	51.5	55.0	58.3	61.0	63.0	63.8	64.0	64.2	64.9	65.5
-55	0.16	1.32	8.06	16.6	26.3	34.3	41.2	47.3	52.2	56.3	60.2	63.6	66.6	69.2	71.1	72.5	73.5	74.8	75.7
-50	0.27	6.48	14.9	26.4	36.5	44.4	51.2	57.1	61.9	66.0	69.6	72.7	75.5	77.9	80.0	82.2	84.3	85.8	86.3
-45	0.16	2.15	10.8	21.9	34.3	43.8	51.6	58.2	63.7	68.3	72.9	77.4	81.5	85.1	89.0	94.3	101	108	112
-40	0.35	8.47	18.7	32.8	44.2	52.8	60.1	66.2	71.2	76.0	81.7	87.1	91.9	96.9	104	114	127	136	136
-35	0.16	3.02	13.1	25.8	40.3	50.5	58.7	65.7	71.6	77.0	83.7	91.0	106	142	192	247	299	337	354
-30	0.41	10.0	21.3	37.1	49.5	58.4	66.0	72.6	78.3	85.7	94.2	108	159	245	347	444	521	566	563
-25	0.17	3.95	15.1	28.4	44.7	55.1	63.5	71.0	77.4	84.9	95.6	129	211	332	467	597	707	784	818
-20	0.48	11.3	23.4	40.5	53.2	62.2	70.2	77.3	84.8	95.7	125	237	402	580	746	889	994	1056	1046
-15	0.19	4.80	16.4	29.8	47.7	58.1	66.5	74.8	82.2	92.5	117	224	403	601	786	946	1074	1170	1205
-10	0.50	12.1	24.3	42.5	55.4	64.4	72.9	80.9	90.8	109	211	416	642	850	1024	1164	1278	1348	1307
-5	0.22	5.24	17.3	30.3	49.4	60.0	68.7	77.4	86.1	98.9	149	330	569	800	1001	1172	1304	1409	1441
0	0.58	12.6	24.9	43.7	56.8	66.2	75.1	83.7	95.1	123	277	527	778	999	1189	1346	1463	1540	1490
5	0.24	5.33	17.5	30.3	49.8	60.5	69.2	78.1	87.1	100	156	352	600	832	1030	1197	1326	1437	1477
10	0.60	12.5	24.6	43.1	56.2	65.4	74.1	82.5	93.4	116	245	473	706	912	1079	1210	1325	1414	1387
15	0.24	5.08	17.0	29.9	48.7	59.2	67.7	76.1	84.2	95.7	129	269	476	686	872	1027	1149	1258	1304
20	0.60	11.9	24.0	41.5	54.5	63.4	71.5	78.9	87.6	101	155	307	501	691	858	996	1108	1185	1165
25	0.26	4.43	16.0	28.9	46.2	56.7	64.9	72.7	79.5	88.1	102	158	276	428	583	723	841	934	975
30	0.56	10.8	22.3	38.3	51.4	60.2	67.8	74.7	80.9	89.4	101	137	231	353	480	598	691	752	749
35	0.28	3.60	14.3	26.9	42.4	52.8	61.0	68.1	74.1	80.1	87.6	98.8	132	191	266	348	423	480	506
40	0.53	9.35	20.0	34.6	46.9	55.5	62.8	69.1	74.2	79.4	85.8	92.2	99.9	116	150	191	228	249	250
45	0.31	2.65	12.1	23.5	37.0	47.1	55.0	61.7	67.4	71.9	76.8	82.0	87.1	93.5	106	127	148	165	172
50	0.48	7.45	16.6	29.1	40.1	48.4	55.4	61.4	66.1	70.1	74.1	77.8	81.1	83.9	86.5	88.6	90.2	91.1	91.3
55	0.33	1.68	9.37	18.9	29.9	38.9	46.1	52.3	57.6	61.9	65.7	69.4	72.6	75.3	77.5	79.3	80.4	81.1	81.6
60	0.45	5.39	12.5	22.3	31.0	38.2	44.5	49.8	54.5	58.4	61.9	65.0	67.5	69.5	70.8	71.3	71.5	71.8	72.1
65	0.34	1.01	6.34	12.9	20.5	27.4	33.0	37.9	42.8	46.7	50.1	53.5	56.4	58.6	60.1	61.0	61.4	61.7	62.3
70	0.43	3.00	7.34	12.8	18.3	23.6	27.3	32.2	36.0	39.1	42.5	45.6	48.1	49.7	50.7	51.3	51.7	52.3	52.8
75	0.36	0.62	3.29	6.73	10.6	14.6	18.1	21.2	24.7	27.7	30.3	33.0	35.4	37.2	38.5	39.2	39.7	40.1	40.5
80	0.41	1.09	3.11	5.31	7.51	10.0	12.6	14.6	17.2	19.4	21.4	23.3	24.9	26.3	27.2	27.8	28.2	28.4	28.6
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.95V I:0.4341A P:93.967W PF:0.9842 Freq:49.99Hz Lamp Flux:13974.8x1 lm		
NAME: LED High Bay Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:100W	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	24.3	20.1	18.7	17.7	16.5	15.1	13.7	12.4	10.9	9.07	7.44	5.82	4.21	2.70	1.29	0.41	0.20	0.15	
-75	36.7	33.2	31.9	31.2	30.4	29.0	27.0	24.8	22.6	20.2	16.9	14.3	11.4	7.96	5.11	2.64	0.73	0.18	
-70	44.5	44.4	44.3	43.9	42.7	40.6	37.6	34.6	31.6	27.3	23.0	19.6	14.3	9.52	5.91	2.39	0.28	0.15	
-65	55.2	55.2	55.7	55.8	55.1	53.3	50.7	47.6	44.3	40.6	36.1	31.6	26.1	19.9	13.2	6.79	2.07	0.18	
-60	65.8	66.5	67.3	67.2	65.7	63.0	60.0	56.7	52.7	48.6	43.8	37.3	30.6	22.1	12.4	5.24	0.47	0.15	
-55	75.9	75.7	75.6	75.2	74.3	72.4	69.8	66.8	63.2	59.0	54.4	48.4	41.3	33.2	22.6	11.5	4.05	0.19	
-50	85.8	84.7	83.5	82.3	80.9	78.8	76.2	72.8	68.7	64.1	58.0	51.0	42.7	32.1	18.7	8.32	0.95	0.16	
-45	110	104	97.2	92.0	88.7	86.1	83.3	80.0	76.1	72.0	66.6	60.0	52.4	43.1	29.9	15.6	6.09	0.21	
-40	128	115	104	97.4	93.4	90.3	86.6	82.7	78.7	73.9	67.6	60.1	51.4	39.3	23.1	10.9	1.55	0.16	
-35	342	307	259	207	157	114	94.9	89.2	84.6	80.2	75.0	67.9	59.8	50.3	35.2	18.8	7.89	0.23	
-30	518	444	352	256	165	109	95.7	90.3	85.2	80.6	74.3	66.2	57.4	45.1	26.6	13.1	2.24	0.17	
-25	785	714	617	499	370	243	147	100	91.1	85.7	80.6	73.3	64.7	55.2	39.0	21.3	9.32	0.25	
-20	973	875	743	588	419	252	127	97.1	90.4	84.8	78.8	70.2	61.0	49.1	28.4	14.7	2.85	0.18	
-15	1147	1063	958	818	651	464	275	137	97.2	90.0	84.2	76.9	67.9	58.3	41.9	23.0	10.3	0.26	
-10	1222	1135	1011	853	661	446	233	110	94.7	88.2	81.8	72.9	63.4	51.9	29.6	15.9	3.38	0.20	
-5	1359	1265	1161	1016	840	630	401	191	103	93.5	86.9	79.4	70.2	60.1	43.8	24.0	10.9	0.28	
0	1380	1280	1144	976	772	542	302	127	97.7	91.0	84.0	74.8	64.7	53.0	29.9	16.3	3.46	0.21	
5	1397	1297	1191	1044	866	655	424	205	105	94.2	87.5	79.9	70.6	60.3	44.3	24.2	11.1	0.29	
10	1290	1196	1069	908	711	494	273	119	96.1	89.4	82.7	73.7	64.0	52.6	30.2	16.2	3.44	0.21	
15	1242	1150	1042	899	726	530	329	159	99.7	91.5	85.2	77.9	68.7	59.0	43.3	23.8	10.7	0.29	
20	1083	982	851	690	509	322	165	101	92.1	85.8	79.8	71.2	61.9	50.4	29.8	15.3	2.90	0.21	
25	932	852	746	615	466	317	186	110	93.3	87.1	81.7	74.6	65.8	56.5	41.0	22.6	9.85	0.30	
30	690	602	490	364	243	145	101	92.8	87.0	81.8	75.8	67.7	58.9	47.2	28.6	14.1	2.35	0.22	
35	487	437	368	288	210	148	105	92.1	86.7	81.8	76.6	69.8	61.6	52.3	37.7	20.6	8.53	0.30	
40	229	193	151	116	98.9	93.6	89.7	84.8	80.6	75.8	69.7	62.2	53.7	41.9	25.6	12.0	1.71	0.22	
45	167	153	133	111	96.1	90.0	86.6	82.8	78.6	74.4	69.3	62.7	55.1	45.9	32.8	17.6	6.77	0.31	
50	90.6	89.6	88.4	86.5	84.5	82.2	79.1	75.7	71.6	67.3	61.4	54.3	46.0	35.4	21.4	9.51	0.95	0.24	
55	81.6	81.4	81.0	80.2	78.8	76.8	74.2	71.1	67.6	63.4	58.6	52.6	45.4	36.9	25.9	13.6	4.66	0.32	
60	72.3	72.7	72.9	72.3	70.8	68.5	65.7	62.4	58.7	54.0	48.9	42.5	35.0	26.0	15.3	6.26	0.57	0.26	
65	62.4	62.4	62.5	62.4	61.5	59.9	57.4	54.1	50.7	47.0	42.3	36.9	31.3	24.3	16.3	8.47	2.56	0.33	
70	52.4	52.3	52.2	51.6	50.4	48.4	45.3	41.8	38.4	34.6	29.2	24.9	19.6	13.1	7.71	3.05	0.42	0.28	
75	40.6	40.4	40.1	39.7	38.8	37.3	35.2	32.5	29.8	26.9	23.3	19.6	16.0	11.6	7.24	3.71	1.07	0.33	
80	28.5	28.2	27.6	26.8	25.5	23.8	21.9	19.9	17.9	15.1	12.8	9.94	7.16	4.68	2.36	0.80	0.37	0.31	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:15 October 2019

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks: