


# LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.38 lm/W			
MODEL:Z-FEL-I-6-V01-RN-110-F		Imax(cd)	300.8	S/MH(C0/180)	1.24
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.31
RATED VOLTAGE(V)		TOTAL FLUX(lm)	645.95	$\eta$ UP,DN(C0-180)	0.0,45.6
NOMINAL FLUX(lm)	645.945	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,54.4
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		$\eta$ down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

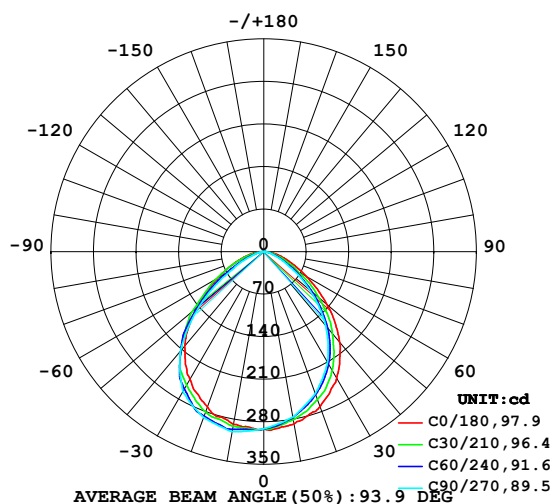

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

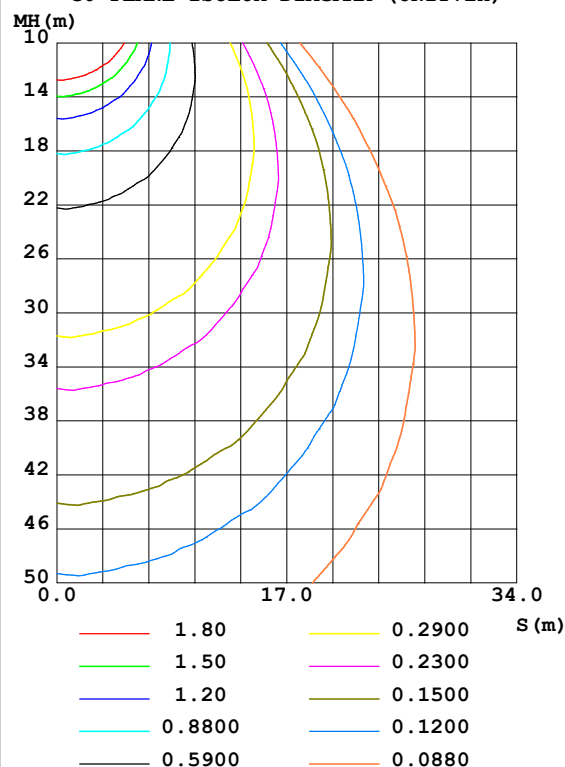

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	287.9	277.5	276.4	277.5	288.4	294.0	300.8	293.3	0- 10	27.59	27.59	4.27,4.27
20	271.2	254.7	248.4	252.0	271.8	282.9	290.3	285.2	10- 20	78.77	106.4	16.5,16.5
30	240.2	217.6	210.5	217.7	243.2	259.8	266.1	259.3	20- 30	117.7	224.1	34.7,34.7
40	194.7	169.8	158.3	171.0	202.6	216.3	213.5	215.0	30- 40	135.4	359.5	55.7,55.7
50	136.4	110.8	99.28	114.2	144.4	152.8	136.3	147.9	40- 50	124.4	483.9	74.9,74.9
60	80.55	59.06	47.31	60.37	87.78	83.45	60.47	82.49	50- 60	88.56	572.5	88.6,88.6
70	41.56	26.43	18.39	26.60	46.33	35.50	21.15	35.90	60- 70	49.05	621.5	96.2,96.2
80	15.91	7.779	5.194	7.912	18.99	8.587	4.764	8.575	70- 80	20.98	642.5	99.5,99.5
90	0.3228	0	0	0	0.1569	0	0	0	80- 90	3.423	645.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 425.01 lm

%lum = 65.8%

%lamp = 65.8%

Conical surface Flux(120deg): 572.49 lm

%lum = 88.6%


%lamp = 88.6%

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:CL  
 Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
 Humidity:65.0%  
 Test Distance:6.010m [K=1.0000]  
 Remarks:

### LUMINANCE LIMITATION CURVES

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

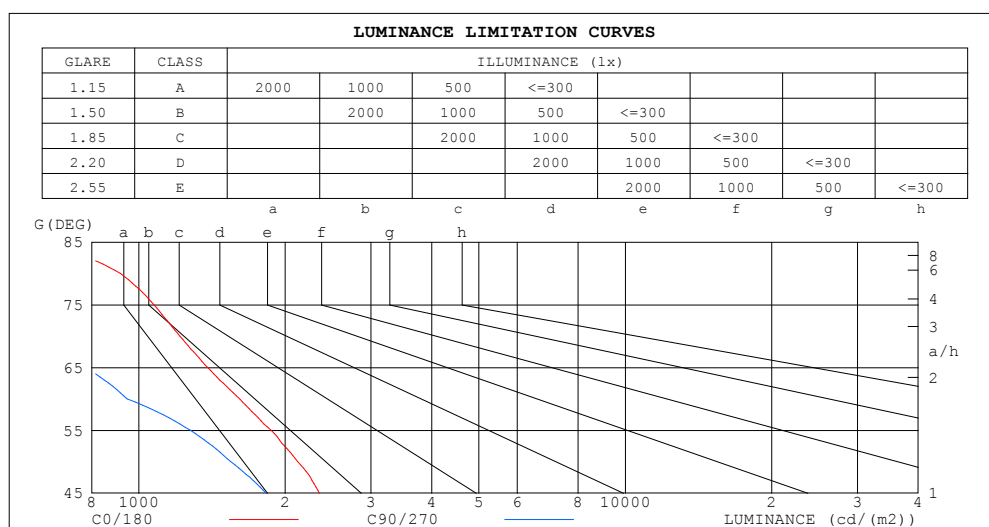

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	551	0
80	916	299
75	1074	457
70	1215	538
65	1386	777
60	1611	946
55	1871	1276
50	2122	1545
45	2352	1827


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

### CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
p <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.97	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.87	.83	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75
3.0	.84	.77	.72	.83	.76	.71	.80	.74	.70	.77	.73	.68	.75	.71	.67	.65
4.0	.76	.68	.62	.74	.67	.61	.72	.66	.61	.70	.64	.60	.68	.63	.59	.57
5.0	.68	.60	.54	.67	.60	.54	.65	.58	.53	.63	.57	.53	.62	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.48	.59	.52	.47	.58	.52	.47	.56	.51	.46	.45
7.0	.57	.48	.43	.56	.48	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.38	.51	.44	.38	.50	.43	.38	.49	.42	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.30

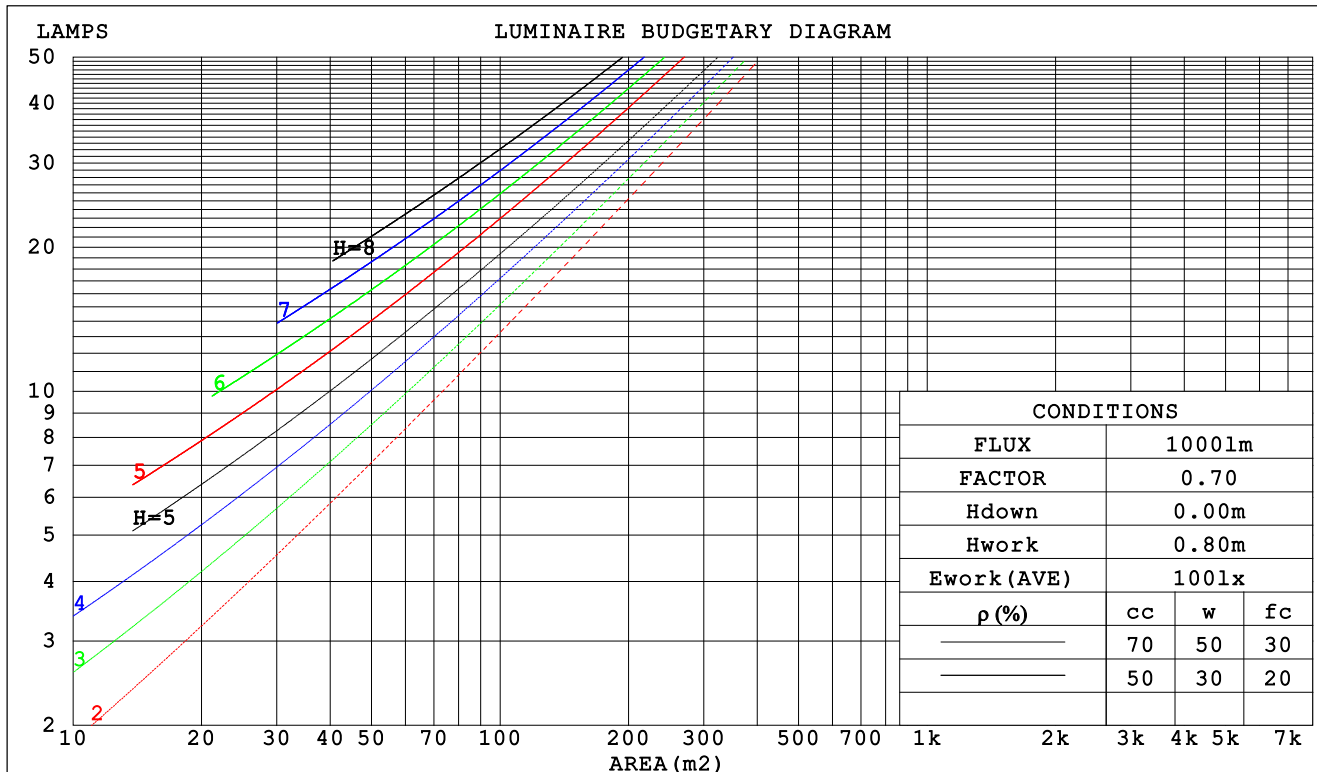

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:CL  
 Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
 Humidity:65.0%  
 Test Distance:6.010m [K=1.0000]  
 Remarks:

### WEC AND CCEC

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.259	.147	.047	.252	.144	.046	.239	.137	.044	.227	.131	.042	.216	.125	.040		
2.0	.251	.138	.042	.245	.135	.042	.234	.130	.040	.223	.125	.039	.213	.121	.038		
3.0	.237	.126	.038	.232	.124	.037	.222	.120	.037	.213	.117	.036	.204	.113	.035		
4.0	.223	.116	.034	.218	.114	.034	.209	.111	.033	.201	.108	.033	.193	.105	.032		
5.0	.209	.106	.031	.205	.105	.031	.197	.102	.030	.189	.100	.030	.183	.098	.029		
6.0	.196	.098	.028	.192	.097	.028	.185	.095	.028	.179	.093	.027	.173	.091	.027		
7.0	.184	.091	.026	.181	.090	.026	.174	.088	.025	.169	.086	.025	.163	.085	.025		
8.0	.173	.085	.024	.170	.084	.024	.165	.082	.023	.159	.081	.023	.155	.079	.023		
9.0	.163	.079	.022	.161	.078	.022	.156	.077	.022	.151	.076	.022	.147	.074	.022		
10.0	.154	.074	.021	.152	.073	.020	.148	.072	.020	.143	.071	.020	.139	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.151	.134	.119	.103	.092	.082	.060	.054	.048	.019	.017	.015	
2.0	.167	.132	.103	.143	.114	.089	.098	.079	.062	.056	.046	.036	.018	.015	.012	
3.0	.158	.114	.079	.136	.098	.068	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.150	.100	.062	.129	.087	.054	.089	.060	.038	.051	.035	.023	.017	.012	.007	
5.0	.143	.090	.050	.123	.078	.044	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.136	.081	.042	.117	.070	.036	.081	.049	.026	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.031	.077	.045	.022	.045	.027	.013	.014	.009	.004	
8.0	.124	.068	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.118	.063	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.007	.003	
10.0	.113	.059	.023	.097	.051	.020	.068	.036	.015	.039	.021	.009	.013	.007	.003	

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm										
NAME: LED Explosion-proof Flood Light					TYPE:Floodlight			WEIGHT:N/A		
SPEC.:3000K					DIM.: N/A			SERIAL No.:N/A		
MFR.: NJZ Lighting Technology Co.,Ltd					SUR.:N/A			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.8	17.1	16.0	17.3	17.5	14.1	15.5	14.4	15.7	15.9
3H	16.6	17.9	16.9	18.1	18.4	14.5	15.7	14.8	16.0	16.2
4H	17.0	18.2	17.3	18.4	18.7	14.6	15.8	14.9	16.0	16.3
6H	17.2	18.4	17.6	18.6	18.9	14.6	15.7	14.9	16.0	16.2
8H	17.3	18.4	17.6	18.6	18.9	14.5	15.6	14.9	15.9	16.2
12H	17.3	18.3	17.7	18.6	18.9	14.5	15.5	14.8	15.8	16.1
4H 2H	15.9	17.1	16.2	17.3	17.6	14.5	15.7	14.8	15.9	16.2
3H	16.9	17.9	17.2	18.2	18.5	15.0	16.0	15.3	16.3	16.6
4H	17.3	18.3	17.7	18.6	18.9	15.1	16.1	15.5	16.4	16.7
6H	17.7	18.5	18.1	18.9	19.2	15.2	16.0	15.6	16.4	16.7
8H	17.8	18.6	18.2	18.9	19.3	15.2	15.9	15.6	16.3	16.7
12H	17.8	18.6	18.3	18.9	19.3	15.1	15.8	15.6	16.2	16.6
8H 4H	17.3	18.1	17.7	18.5	18.8	15.2	16.0	15.6	16.4	16.7
6H	17.7	18.4	18.2	18.8	19.2	15.3	16.0	15.8	16.4	16.8
8H	17.9	18.5	18.3	18.9	19.3	15.4	15.9	15.8	16.3	16.8
12H	18.0	18.5	18.5	18.9	19.4	15.3	15.8	15.8	16.2	16.7
12H 4H	17.3	18.0	17.7	18.4	18.8	15.2	15.9	15.6	16.3	16.7
6H	17.7	18.3	18.2	18.7	19.1	15.4	15.9	15.8	16.3	16.8
8H	17.9	18.4	18.4	18.8	19.3	15.4	15.8	15.8	16.3	16.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.6 / - 0.7				
1.5H	+ 0.3 / - 0.5					+ 0.3 / - 0.4				
2.0H	+ 1.0 / - 1.0					+ 1.2 / - 1.4				

CIE Pub.117, 645.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.5)

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	53	47	63	53	47	62	52	47	41
0.80	74	64	57	73	63	57	71	62	56	50
1.00	82	72	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	73	85	78	73	66
1.50	93	85	79	92	84	79	89	83	78	71
2.00	99	92	87	98	91	86	94	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	105	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

$H(\beta)$  Range:-90 - 90DEG  
 $H(\beta)$  Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:CL  
 Test Date:18 June 2019

$V(B)$  Range:-80 - 80DEG  
 $V(B)$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
 Humidity:65.0%  
 Test Distance:6.010m [K=1.0000]  
 Remarks:

# ISOCANDELA DIAGRAM

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

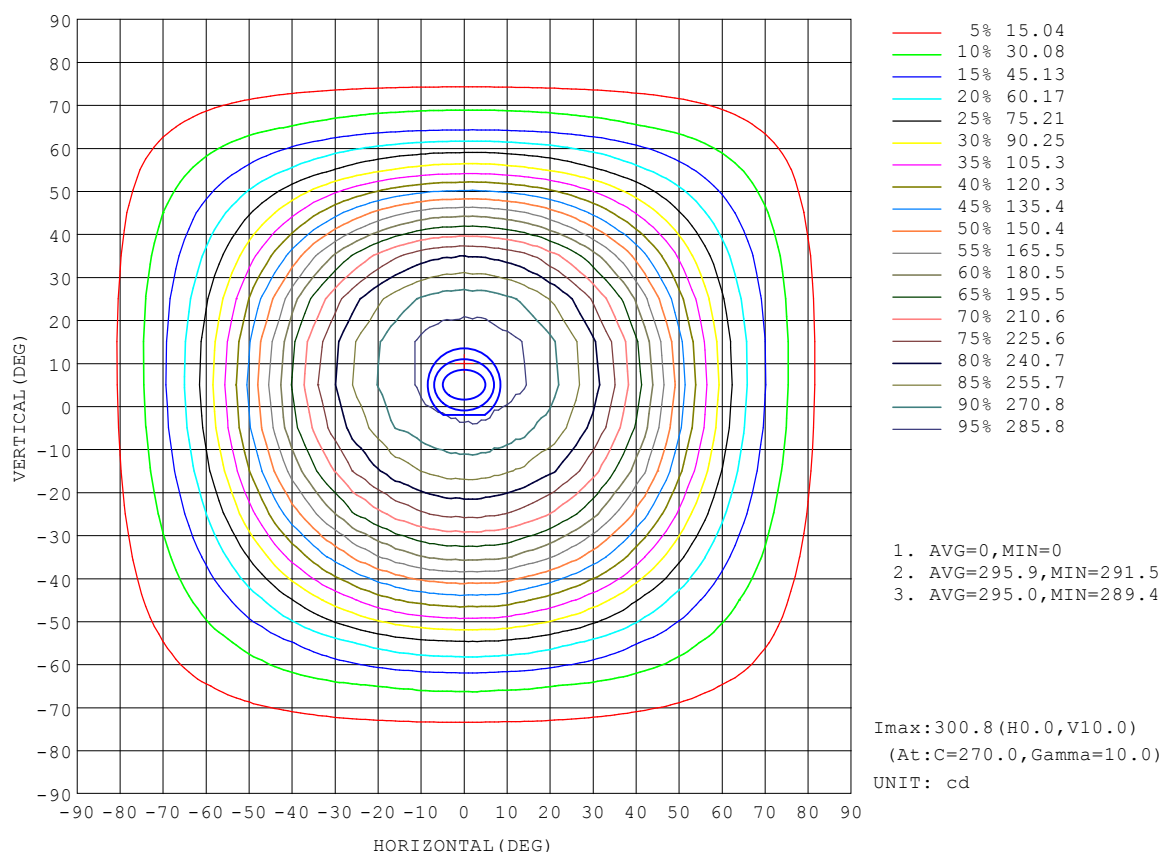

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019


V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Flux out:425.0 lm

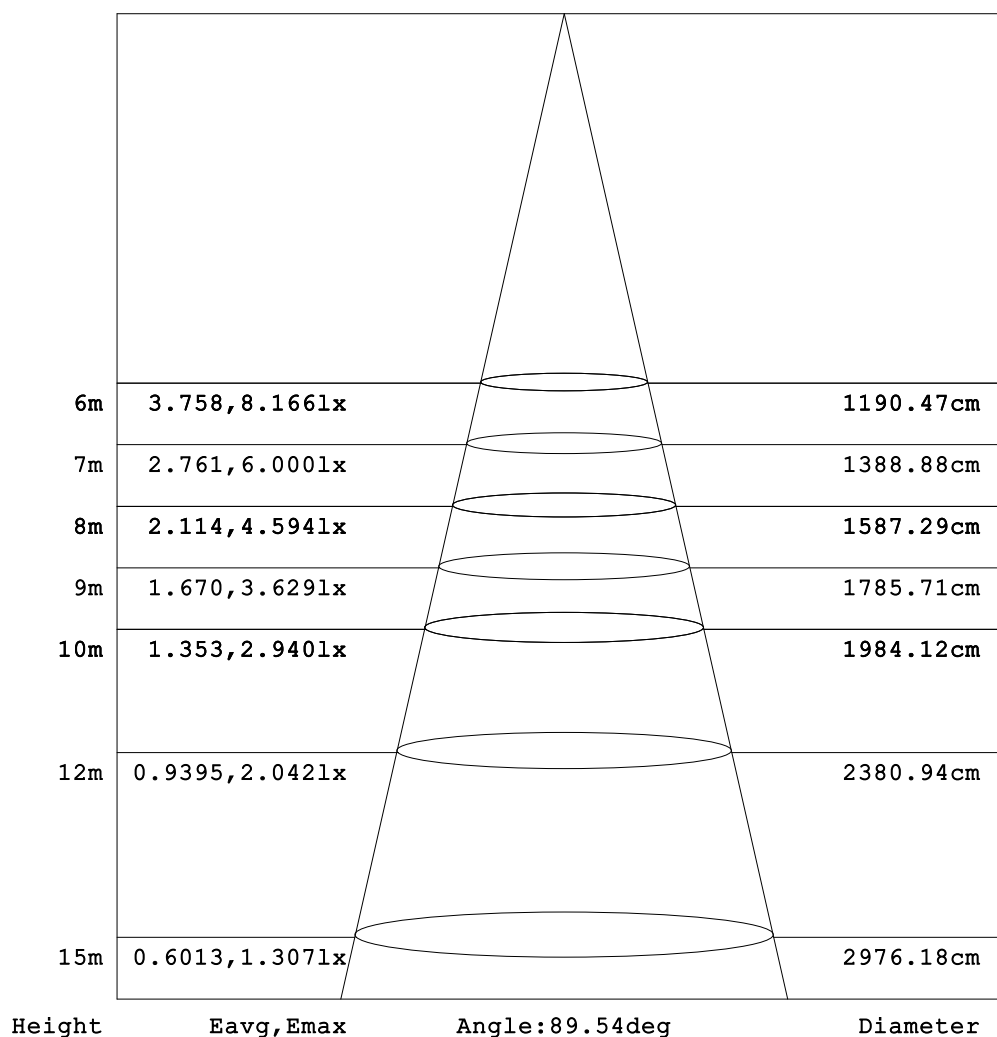


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

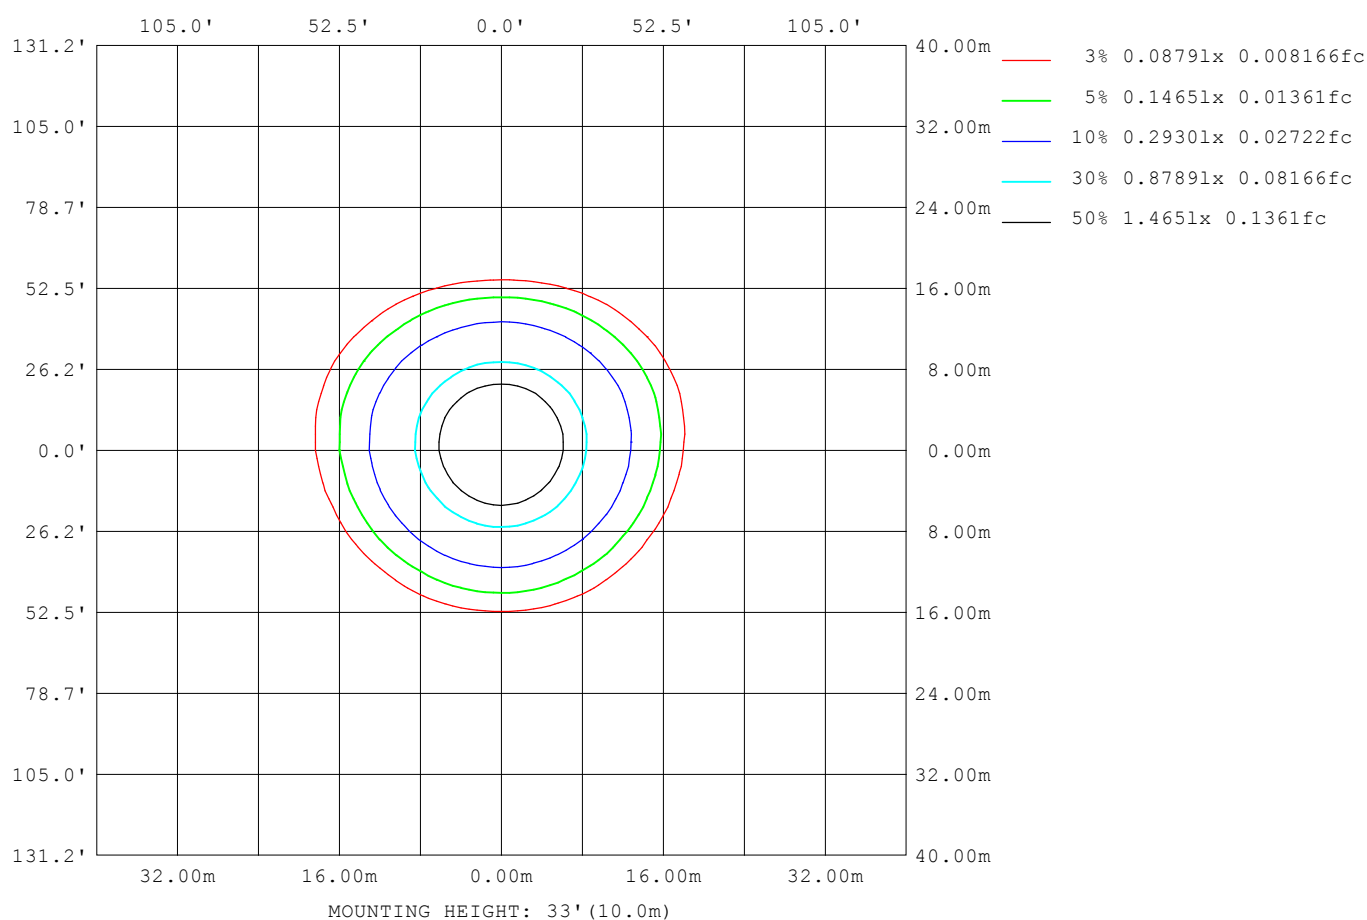

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

### LED Avg.L Report

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A


AvgL	cd/m2
L_0~180 (65) av	1458
L_0~180 (75) av	1145
L_0~180 (85) av	708
L_90~270 (65) av	870
L_90~270 (75) av	478
L_90~270 (85) av	0
L_45 (65) av	1160
L_45 (75) av	663
L_45 (85) av	158

Standard: GB/T 29293-2012

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

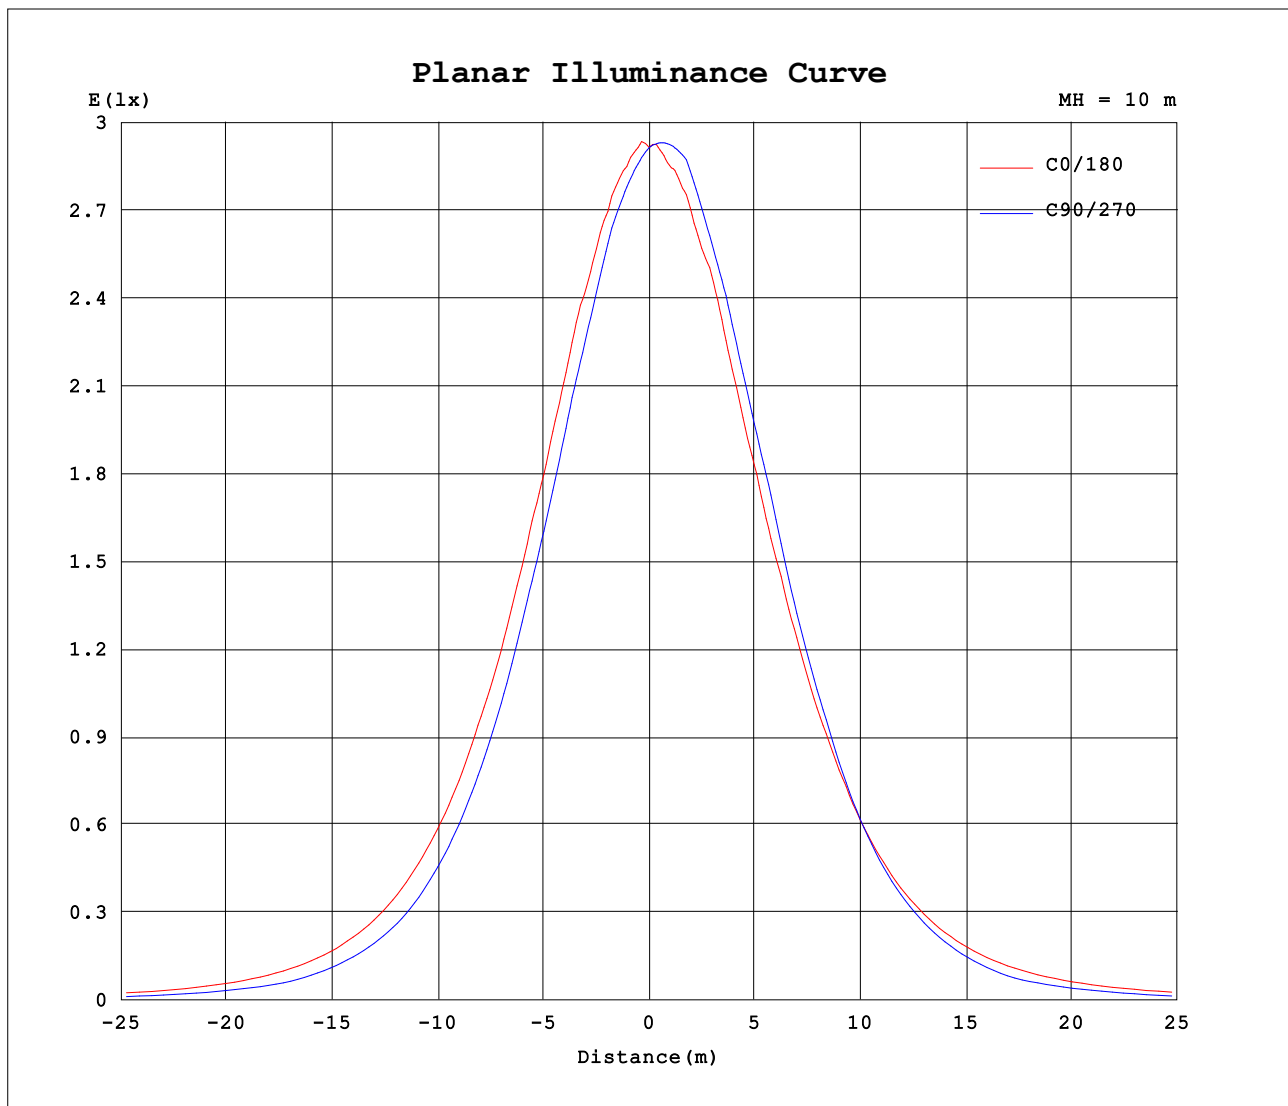

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--1

UNIT: cd

[illegible]

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.366  
Humidity:65.0%  
Test Distance:6.010m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--2

UNIT: cd

[illegible]

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

```
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:
```

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--3

UNIT: cd

[illegible]

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

```
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:
```

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:34.640V I:0.1720A P:5.9600W PF:0.0000 Freq:0Hz Lamp Flux:645.945x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:3000K	DIM.: N/A	SERIAL No.:N/A
MFR.: NJZ Lighting Technology Co.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--4

UNIT: cd

[illegible]

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:CL  
Test Date:18 June 2019

```
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:
```